Standard Wiring Diagram

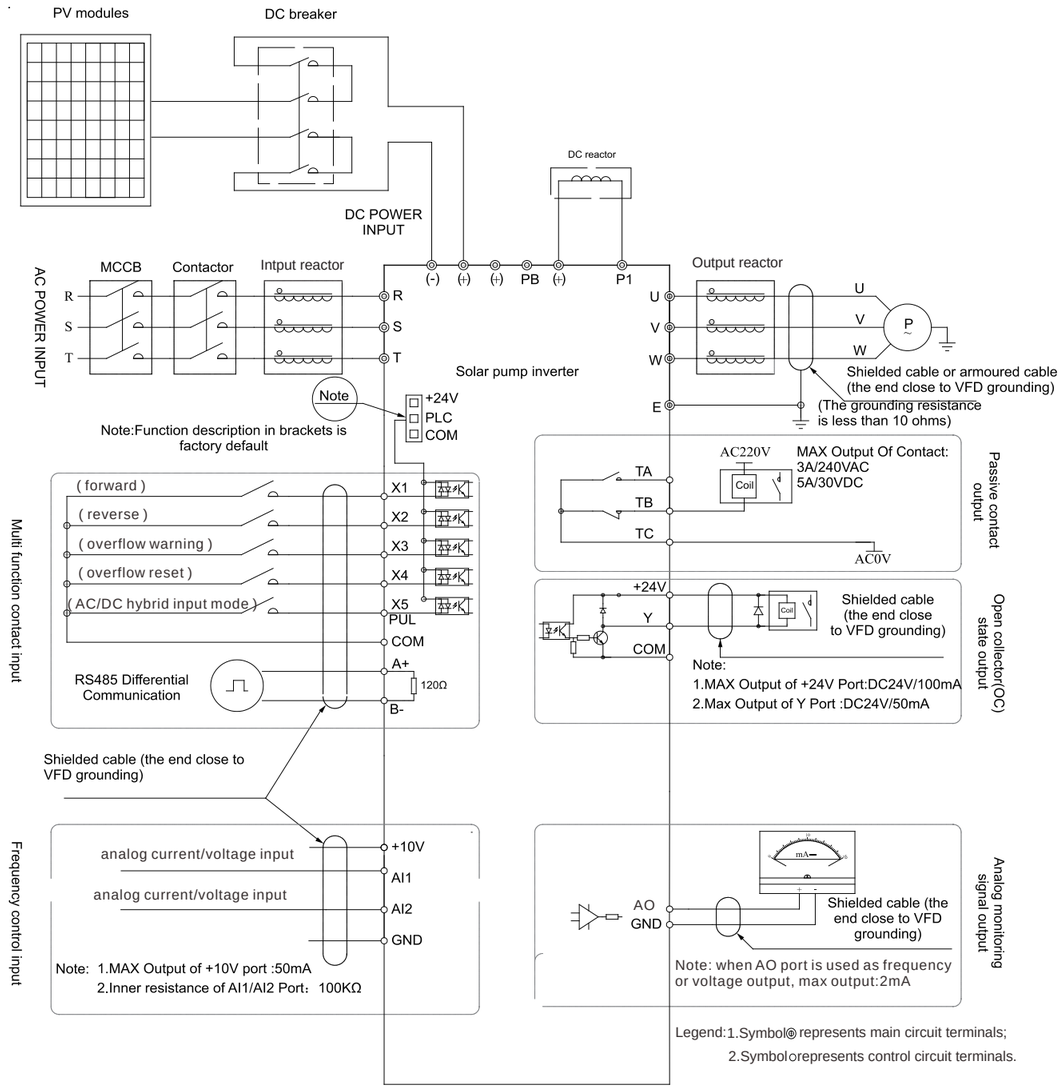

Note: When connect solar panel, both ACinput (R, T) and DCinput (+, -) is okay, ACinput is prefer.

SI21 Series
Solar Pump Inverter

Mini | Economic

Product Features

Flexible & Various Installation

- MINI & Various installation methods

Side by side installation, no need to reserve clearance

Rail mounting, plug into it then use it

Side mounting, sideways installation if vertical space is not compatible

MPPT Technology

- Whole voltage range .
- Efficiency up to 99.8% .

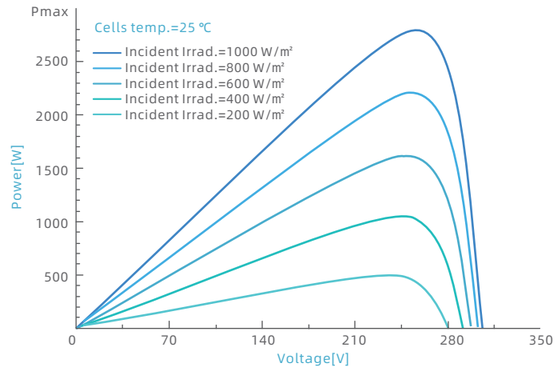

Advanced Technology

- Suitable for asynchronous motors, permanent magnet synchronous motors, synchronous reluctance motors.
- Smooth operation, energy saving and high efficiency

Synchronous reluctance motors

Permanent magnet synchronous motors

Asynchronous motors

Various Specific Functions

- One-key operation .
- Dormancy、dry run、low speed、minimum power、pump over current .
- Water fulfilled、output power limit、PQ curve、pump clean 、constant pressure control .

01. Dry Run	06. Dormancy
02. Low Speed	07. PQ Curve
03. Pump Over Current	08. Pump Clean
04. Minimum Power	09. Water Fulfilled
05. Constant Pressure Control	10. One-key Operation

Functional PC Monitor Software

- Parameters monitoring & Settings .
- Virtual oscilloscope .

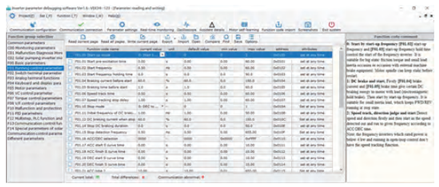

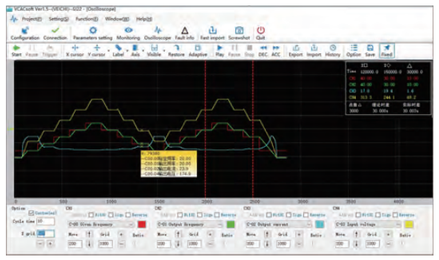

Intelligent IOT

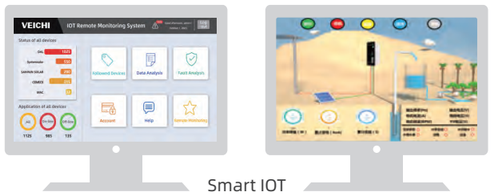

Smart IOT

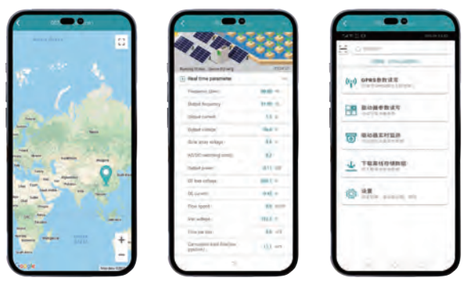

Various Mobile Applications

Naming Rules of SI21 Series Model

SI21 - D1 - 1R5G - A

Product category
SI:stands for the solar pump inverter

Product series
Different series are represented by different two-digit numbers

Voltage class
D1: 155V DC, Suitable for the 110V AC pumps 3PH
D3: 311V DC, Suitable for the 220V AC pumps 3PH
D5: 540V DC, Suitable for the 380V AC pumps 3PH

Suffix
"A" for VEICHI
Non-A for neutral brand

Rated output power
R75G=0.75KW
1R5G=1.5KW
004G=4KW

Dimension of SI21 Solar Pump Inverter

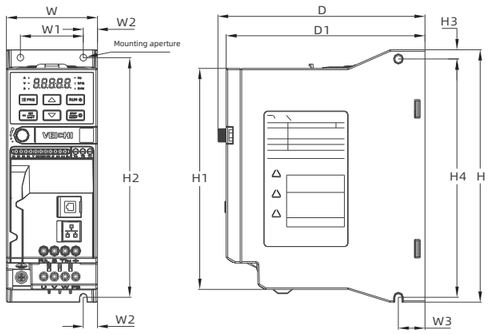

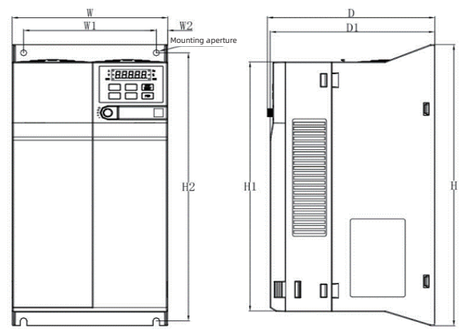

Model	Dimensions (mm)					Installation size (mm)						Mounting aperture
	W	H	H1	D	D1	W1	W2	H2	W3	H3	H4	
SI21-D1-R75G-A	65	177	155	148	142	45	10	168	19	6.5	167	3-M4
SI21-D3-R75G-A												
SI21-D3-1R5G-A												
SI21-D5-R75G-A												
SI21-D5-1R5G-A												
SI21-D5-2R2G-A												
SI21-D1-1R5G-A	75	202	180	163	157	55	10	193	19	6.5	192	3-M4
SI21-D3-2R2G-A												
SI21-D5-004G-A												
SI21-D5-5R5G-A												

Model	Dimensions (mm)					Installation size (mm)						Mounting aperture
	W	H	H1	D	D1	W1	W2	H2	W3	H3	H4	
SI21-D5-7R5G-A	130	320	286	161	158	105	12.5	302	-	-	-	M5
SI21-D5-011G-A												
SI21-D5-015G-A	170	342.5	303.5	183	180	145	12.5	326.5	-	-	-	M5
SI21-D5-018G-A												
SI21-D5-022G-A												

Technical Specification

MODEL	D1	D3	D5
		PV Input	
Input voltage range	60~400V	150~450V	250~780V
Recommended Voc voltage	175~380V	360~430V	620~750V
Maximum MPPT efficiency	up to 99.8%	up to 99.8%	up to 99.8%
		AC Input	
Input voltage range	1PH/3PH 110V	1PH/3PH 220~240V	3PH 380~480V
Input voltage frequency	50/60Hz	50/60Hz	50/60Hz
		Output	
Output voltage range	110~230V	150~230V	230~460V
Output frequency range	0~600Hz	0~600Hz	0~600Hz
Output power range	0.75~1.5kW	0.75~2.2kW	0.75~22kW
Power		**Rated output current**	
0.75kW	7A	4A	3A
1.5kW	10A	7A	4A
2.2kW	-	10A	5A
4kW	-	-	9.5A
5.5kW	-	-	13A
7.5kW	-	-	17A
11kW	-	-	25A
15kW	-	-	32A
18.5kW	-	-	38A
22kW	-	-	45A

	Control Performance	
Motor type	Asynchronous motor, permanent magnet synchronous motor, synchronous reluctance motor	
Control mode	V/F control, open-loop vector control, closed-loop vector control, voltage-frequency separated control	
Overload capacity	150% of rated load for 60s, 180% of overload capacity for 10s, 200% of overload capacity for 0.5s	
	System	
Installation	Hitch mounting	
Protection class	IP20	
Working temperature	-10~60℃	
Cooling method	Forced air cooling	
Humidity	20%~95%RH（condensation free）	
Installation environment	Altitude lower than 1000m. Derate 1% for each 100m rise when above 1000m.No condensation, icing, rain, snow, hail, etc., solar radiation below 700W/m2, air pressure 70kPa～106kPa	

		Protection		
Common potection	Undervoltage / overvoltage	√	√	√
	Input/output phase loss	√	√	√
	Overload	√	√	√
	Overcurrent	√	√	√
	Drive overheat	√	√	√
	Short circuit between phases and to ground	√	√	√
Specialized protection	Low frequency	√	√	√
	Pump overcurrent	√	√	√
	Dry run	√	√	√
	Min. power	√	√	√
	Overflow	√	√	√
	Sleep protection	√	√	√

Solar Pump Inverter Standard Wiring Diagram